

## IP65 Solution

10.4"

### Specifications

**RoHS**  
COMPLIANT  
2011/65/EU

Model Name	R10L100-IPT2
Viewable Size Image	10.4"
Active Display Area(mm)	210.4(H)x157.8(V)
Pixel Pitch(mm)	0.0685(H)x0.2055(V)
Number of Pixels	1024x768
Contrast Ratio	1200:1(typ.)
Display Color	16.2M(6bits/FRC)
Brightness(cd/m <sup>2</sup> )	350 nit (typ.)
Viewing Angle(CR>=10)	-88~88(H); -88~88(V)
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW, IR


Remarks: R10L100 series= VGA input only

R10L110 series= VGA+Video Input

**\*When adding SAW touch, the IP grade will be IP54**



### Mechanical Drawing

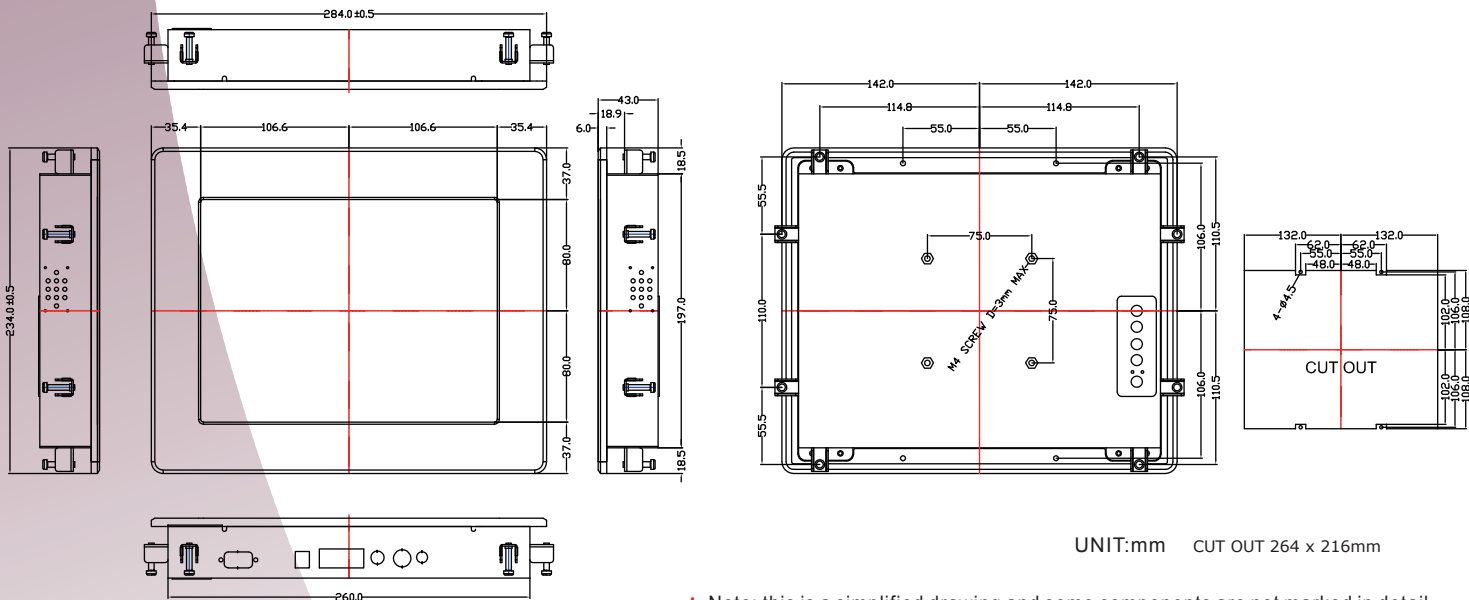

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised date: 29-Jul-2016 V1.3