

IP65 Solution



20.1"

Specifications

RoHS
COMPLIANT
2011/65/EU


Model Name	R20L100-IPA2
Viewable Size Image	20.1"
Active Display Area(mm)	408.0(H)x306.0(V)
Pixel Pitch(mm)	0.255(H)x0.255(V)
Number of Pixels	1600x1200(UXGA)
Contrast Ratio	1400:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	330 nits
Viewing Angle(CR>=10)	-85~85(H); -85~85(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1600x1200@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	60W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, SAW

Remarks: R20L100 series= VGA input only

R20L110 series= VGA+Video Input

***When adding SAW touch, the IP grade will be IP54**

Mechanical Drawing

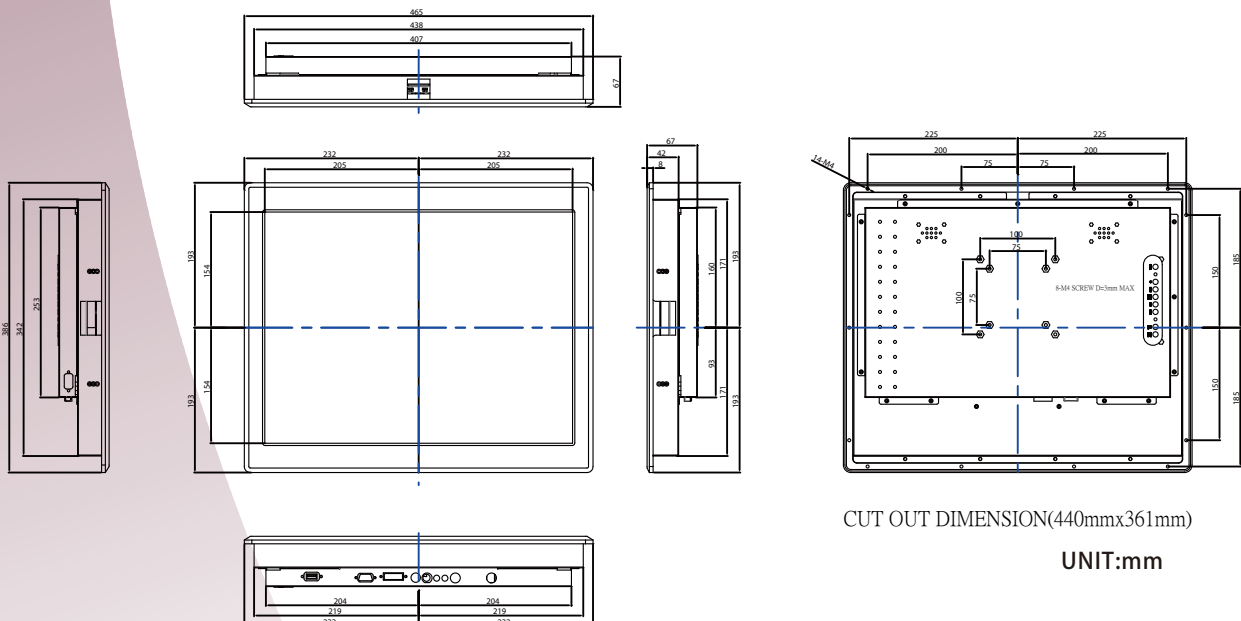

CUT OUT DIMENSION(440mmx361mm)

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised Date:29-Jul-2016 V1.4