

IP65 Solution



21.5" (16:9)


Specifications



| | |
|--------------------------------|---|
| Model Name | W22L100-IPA3 |
| Viewable Size Image | 21.5"(16:9) |
| Active Display Area(mm) | 476.64 (H) x 268.11 (V) |
| Pixel Pitch(mm) | 0.24825 (H) x 0.24825 (V) |
| Number of Pixels | 1920x1080 |
| Contrast Ratio | 3000:1(typ.) |
| Display Color | 16.7M(8bit/color) |
| Brightness(cd/m ²) | 250(typ.) |
| Viewing Angle(CR>=10) | -89~89 (H); -89~89 (V) |
| Synchronization Range | |
| Horizontal/Vertical | 31.5~80.0KHz / 60~75Hz |
| Recommended Resolution | 1920x1080 @ 60Hz |
| Signal Connector | 15 pin D-sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 25W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive |

Remarks:W22L100 series= VGA input only
W22L110 series= VGA+Video Input

Mechanical Drawing

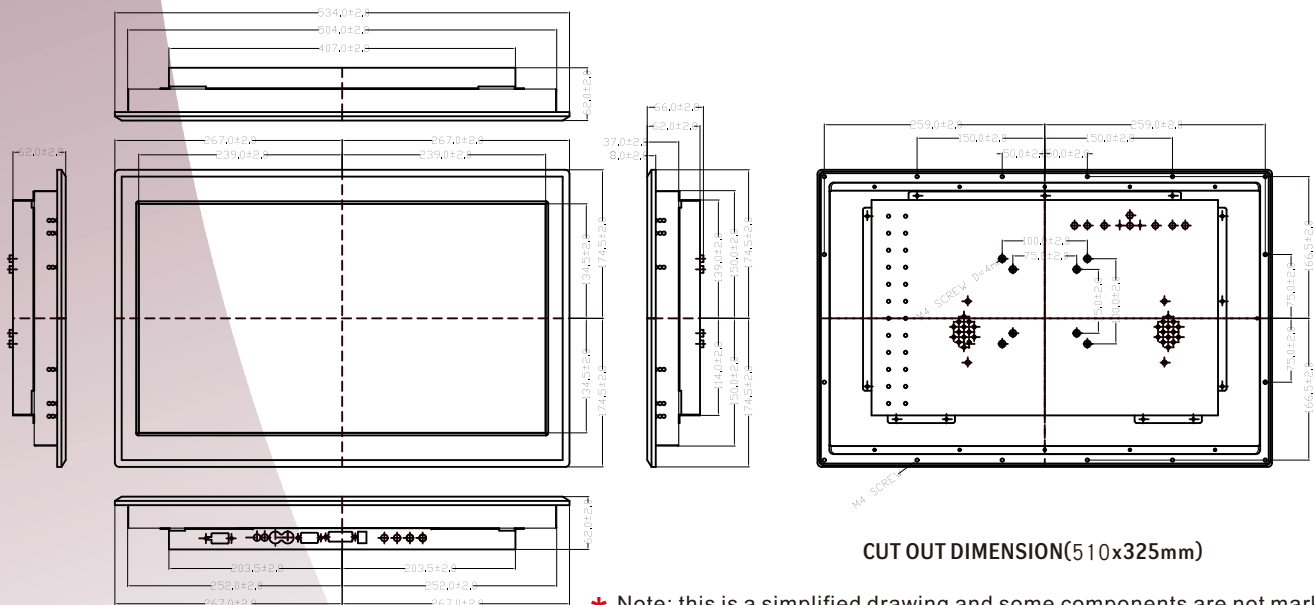

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.