

IP65 Solution



23.8"(16:9)


Specifications



Model Name	W24L100-IPA2
Viewable Size Image	23.8"(16:9)
Active Display Area(mm)	527.04 (H) x 296.46 (V)
Pixel Pitch(mm)	0.2745 (H) x 0.2745 (V)
Number of Pixels	1920x1080
Contrast Ratio	3000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	250(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	31.5~80.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x1080@60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	40W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks:W24L100series= VGA Input only
W24L110 series= VGA+Video Input

Mechanical Drawing

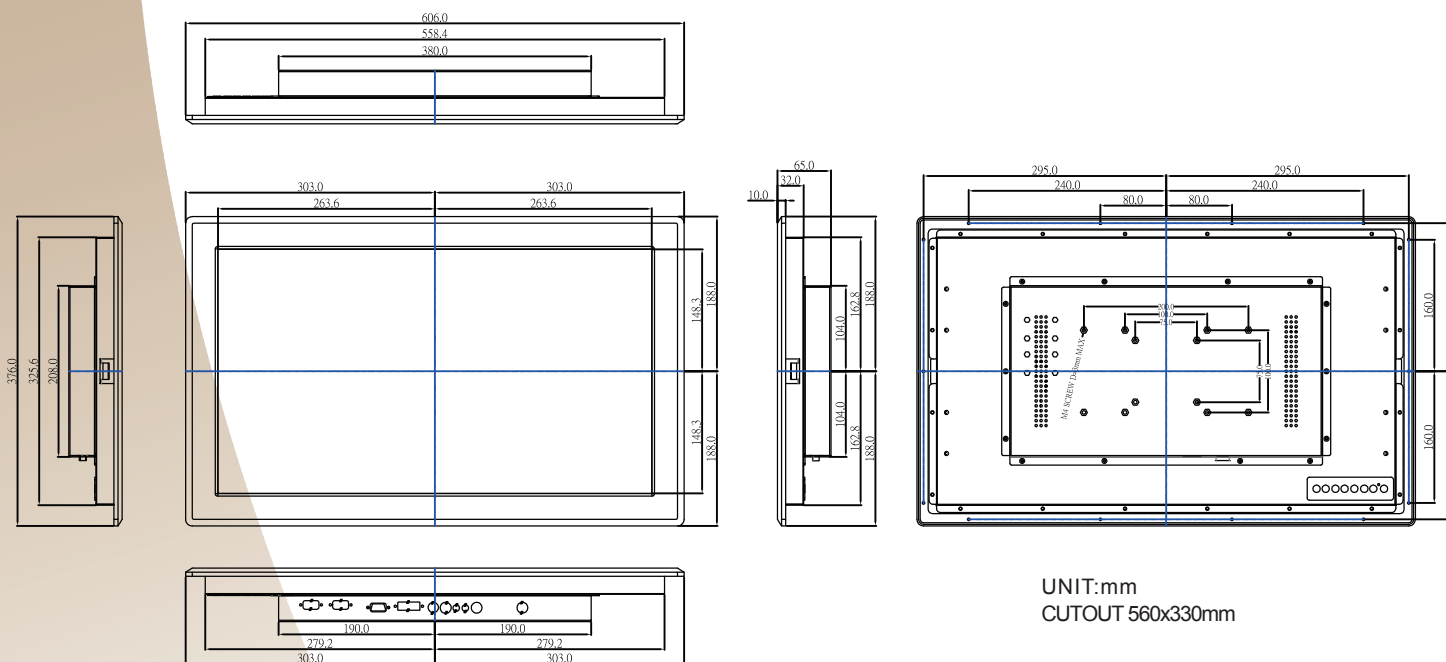

UNIT:mm
CUTOUT 560x330mm